

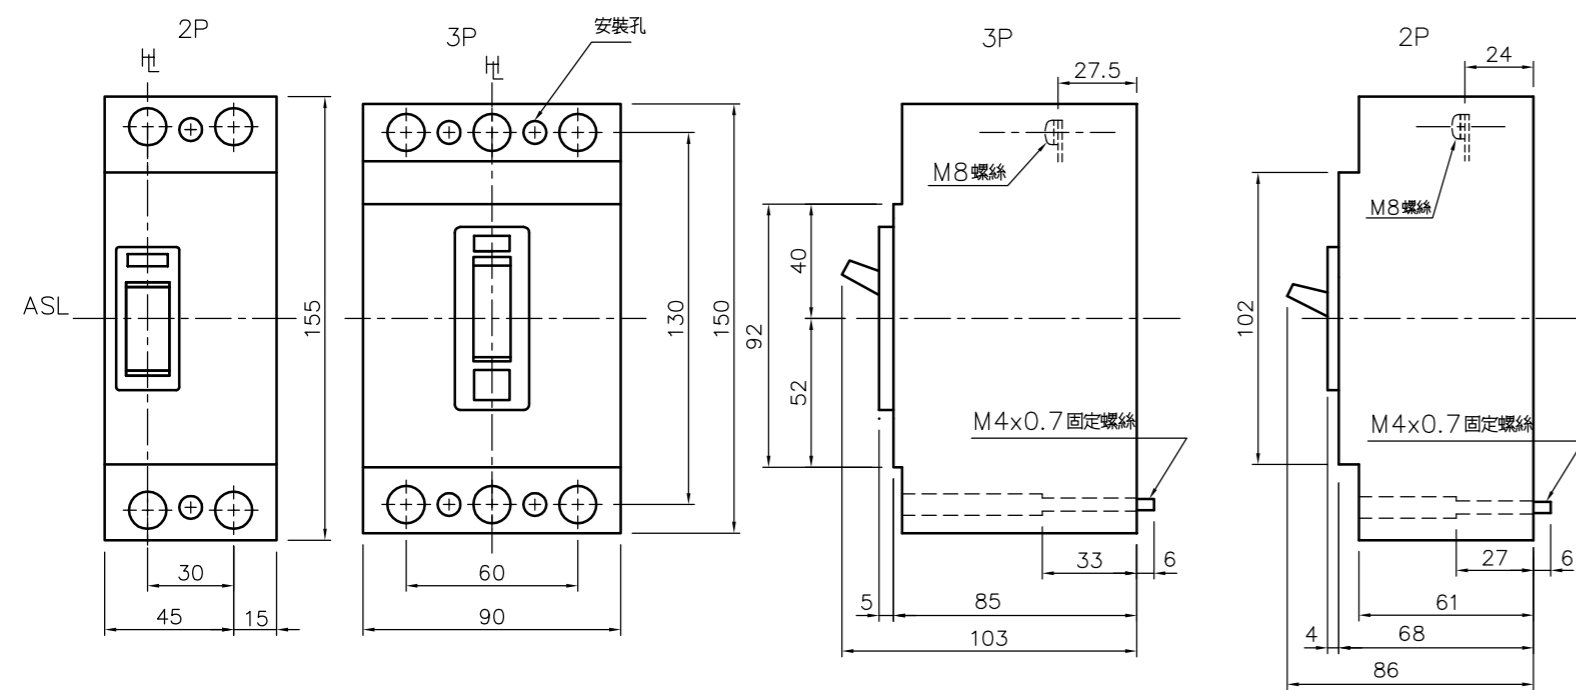


TO-100S(2P/3P) TG-100H(3P)
TO-125S(3P)

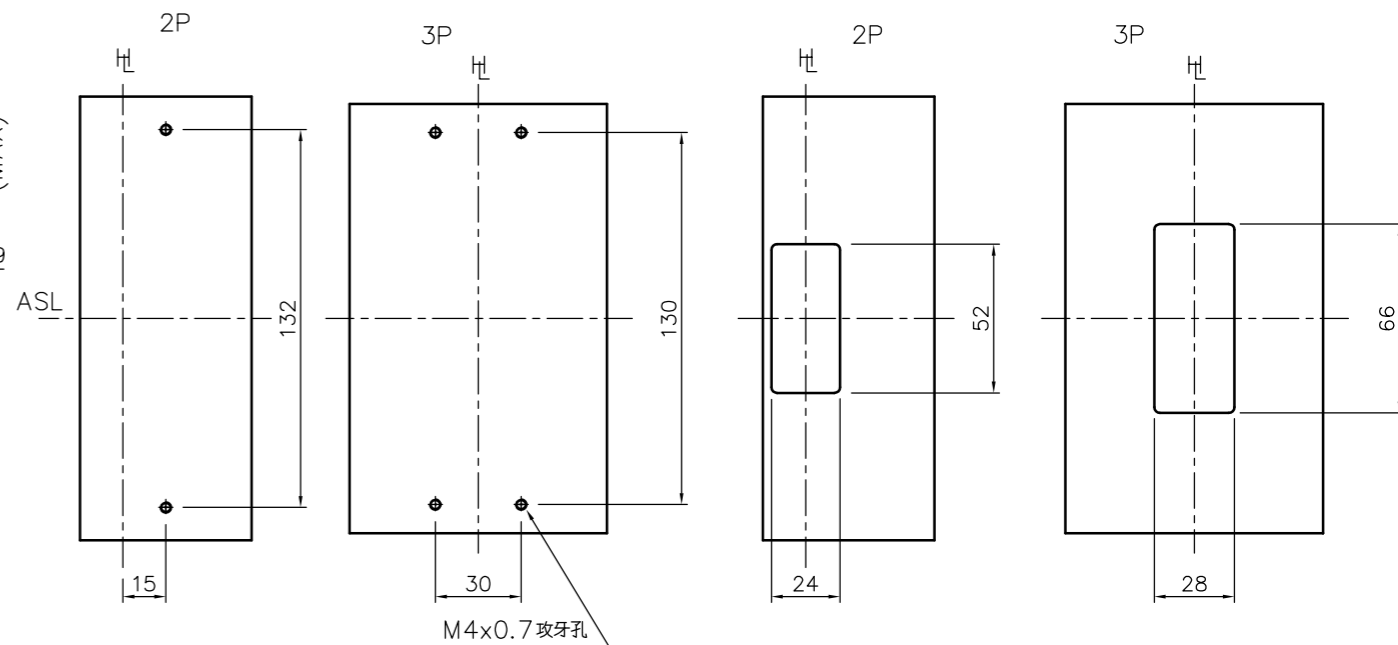

導板準備



固定孔位

盤面孔位

※斷路器尺寸公差為±0.5mm; 盤面孔位公差上下為1.5mm, 左右為2mm.