




TG-400HB 動作特性曲線圖

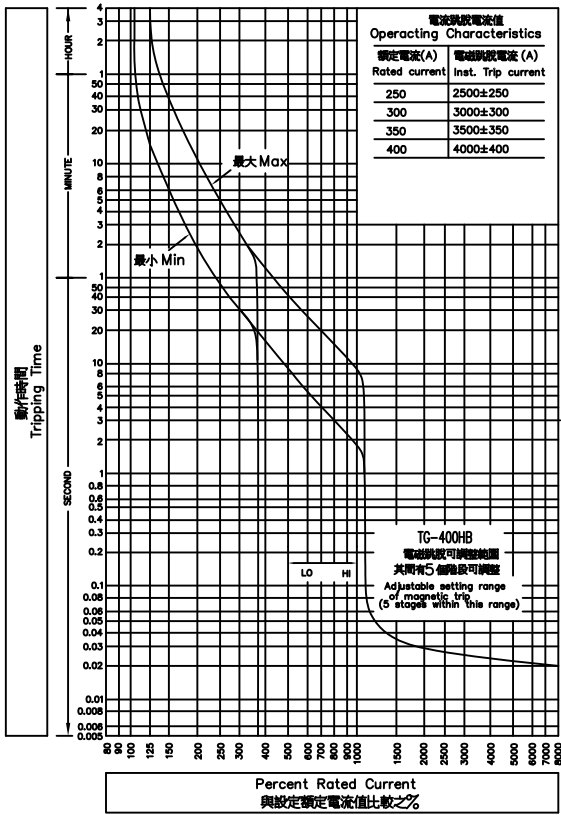

TG-400HJ 動作特性曲線圖

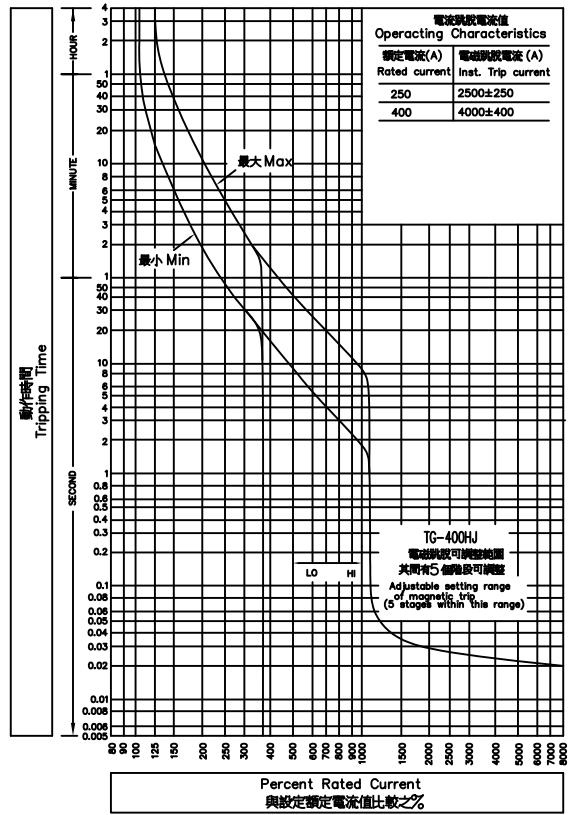


TG-400HB 溫度補正曲線圖

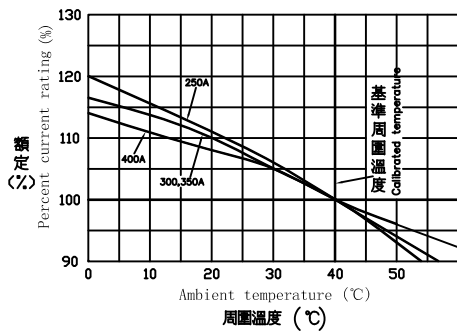

額定電流 rated current (A)	電磁跳脫電流 (A) AC magnetic trip current (A) AC				
	10	8.5	7.1	6	5
250	2500	2125	1750	1500	1250
300	3000	2550	2100	1800	1500
350	3500	2975	2450	2100	1750
400	4000	3400	2850	2400	2000

註：設定誤差 [x10] 為±10%，其它為±25%。
Note: Error shall be ±10% in x10 setting and ±25% in the others setting.

TG-400HJ 溫度補正曲線圖

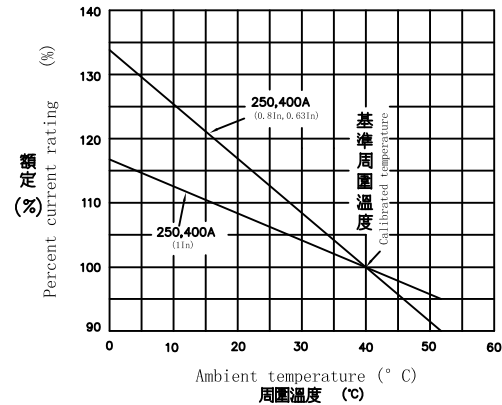

額定電流 rated current (A)	電磁跳脫電流 (A) AC magnetic trip current (A) AC				
	10	8.5	7.1	6	5
250	2500	2125	1750	1500	1250
400	4000	3400	2850	2400	2000

註：設定誤差 [x10] 為±10%，其它為±25%。
Note: Error shall be ±10% in x10 setting and ±25% in the others setting.